



100X Float Valve



200X Pressure Reducing Valve



300X Microresistance  
slow closing check valve




400X Flow Control Valve



500X Pressure Relief Valve



600X Solenoid Valve

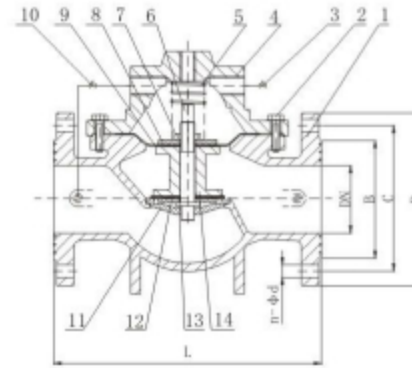

No Part Material

No	Part	Material
1	Body	Cast Iron
2	Bolts	Stainless Steel
3	Ball valve	Brass
4	Cover	Cast Iron
5	Spring	Stainless Steel
6	Stem	Stainless Steel
7	Nut	Stainless Steel
8	Plate	Q235
9	Diaphragm	EPDM
10	Needle valve	Brass
11	Seat	Brass
12	Plate	Q235
13	Gasket	NBR
14	Diaphragm discs	Cast Iron

DN(mm)	L(mm)	D(mm)		C(mm)		B(mm)		n-d	
		PN1.0Mpa	PN1.6Mpa	PN1.0Mpa	PN1.6Mpa	PN1.0Mpa	PN1.6Mpa	PN1.0Mpa	PN1.6Mpa
DN50	215	165		125		99		4-Φ19	
DN65	235	185		145		119		4-Φ19	
DN80	250	200		160		133		8-Φ19	
DN100	290	220		180		154		8-Φ19	
DN125	325	250		210		184		8-Φ19	
DN150	360	285		240		210		8-Φ23	
DN200	420	340		295		265		8-Φ23	12-Φ23
DN250	450	405		350	355	319		12-Φ23	12-Φ28
DN300	670	450		400	410	370		12-Φ23	12-Φ28
DN350	730	520		460	470	429		16-Φ23	16-Φ28
DN400	730	580		515	525	480		16-Φ28	16-Φ31
DN450	800	640		565	585	548		20-Φ28	20-Φ31
DN500	970	715		620	650	685		20-Φ28	20-Φ34
Dn700	1110	910		840	840	794		24-Φ31	24-Φ37

**Description**

1.Flange end : EN1092-2,BS4504,DIN2532,ANSI B16.10

2.Working pressure: PN10/16/25, 125/150/250 PSI

3.Size: DN50-DN800 (2"-32")